

























































GLIDER

MO (mm)	2' - 6" (762)	3' - 0" (914)	3' - 6" (1067)	4' - 0" (1219)	4' - 6" (1372)	5' - 0" (1524)	6' - 0" (1829)
RO (mm)	2' - 6" (762)	3' - 0" (914)	3' - 6" (1067)	4' - 0" (1219)	4' - 6" (1372)	5' - 0" (1524)	6' - 0" (1829)
FS (mm)	2' - 5 1/2" (749)	2' - 11 1/2" (902)	3' - 5 1/2" (1054)	3' - 11 1/2" (1207)	4' - 5 1/2" (1359)	4' - 11 1/2" (1511)	5' - 11 1/2" (1816)
DLO (mm)	11 5/16" (287)	14 5/16" (363)	17 5/16" (440)	20 5/16" (516)	23 5/16" (592)	26 5/16" (668)	32 5/16" (821)
1' - 5 3/4" (451)							
1' - 11 3/4" (603)							
2' - 5 3/4" (756)							
2' - 11 3/4" (908)							
3' - 5 3/4" (1060)							
3' - 11 3/4" (1213)							
4' - 5 3/4" (1365)							
4' - 11 3/4" (1518)							

GBG available in standard Rectangular lite cut, shown. Other GBG lite cuts shown on page 3.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.

Details and Elevations not to scale.

XO operation standard, OX operation optional.

Obscure Glass option available on all units.

Units may optionally include a window opening control device tested to ASTM F2090-10, which can be released from the inside without the use of a key, tool, special knowledge, or force greater than that required for normal unit operation.

























Special sized units available within product size matrix. See your Marvin retailer.

See page 52 for specific PG Ratings.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

MARVIN ESSENTIAL™ COLLECTION
GLIDER TRIPLE SASH

MO (mm)	6'-0" (1829)	7'-0" (2134)	8'-0" (2438)
RO (mm)	6'-0" (1829)	7'-0" (2134)	8'-0" (2438)
FS (mm)	5'-11 1/2" (1816)	6'-11 1/2" (2121)	7'-11 1/2" (2426)

1'-5 3/4" (451) 1'-6" (457) 1'-5 1/2" (445)	 ESGLTS6016	 ESGLTS7016	 ESGLTS8016
1'-11 3/4" (603) 2'-0" (610) 1'-11 1/2" (597)	 ESGLTS6020	 ESGLTS7020	 ESGLTS8020
2'-5 3/4" (756) 2'-6" (762) 2'-5 1/2" (749)	 ESGLTS6026	 ESGLTS7026	 ESGLTS8026
2'-11 3/4" (908) 3'-0" (914) 2'-11 1/2" (902)	 ESGLTS6030	 ESGLTS7030	 ESGLTS8030
3'-5 3/4" (1060) 3'-6" (1067) 3'-5 1/2" (1054)	 ESGLTS6036	 ESGLTS7036	 ESGLTS8036
3'-11 3/4" (1213) 4'-0" (1219) 3'-11 1/2" (1207)	 ESGLTS6040	 ESGLTS7040	 ESGLTS8040 E
4'-5 3/4" (1365) 4'-6" (1372) 4'-5 1/2" (1359)	 ESGLTS6046	 ESGLTS7046	 ESGLTS8046 E
4'-11 3/4" (1518) 5'-0" (1524) 4'-11 1/2" (1511)	 ESGLTS6050	 ESGLTS7050	 ESGLTS8050 E

GBG available in standard Rectangular lite cut, shown.
 Other GBG lite cuts shown on page 3.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.

Details and Elevations not to scale.

Obscure Glass option available on all units.

Units may optionally include a window opening control device tested to ASTM F2090-10, which can be released from the inside without the use of a key, tool, special knowledge, or force greater than that required for normal unit operation.

Special sized units available within product size matrix. See your Marvin retailer.

See page 52 for specific PG Ratings.




For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

MULTIPLE ASSEMBLIES

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.



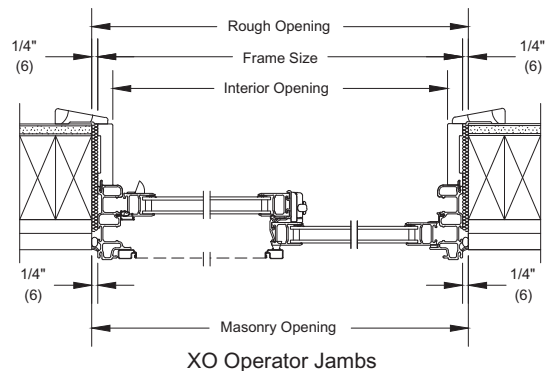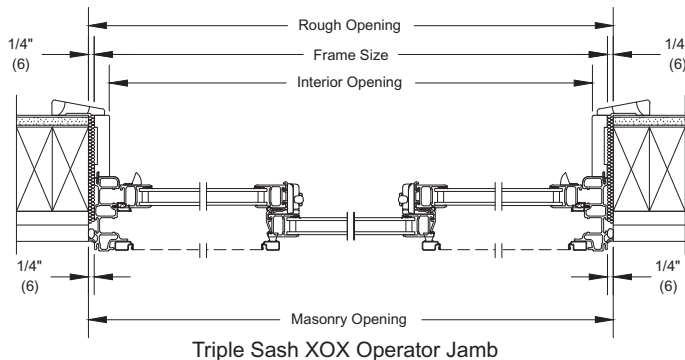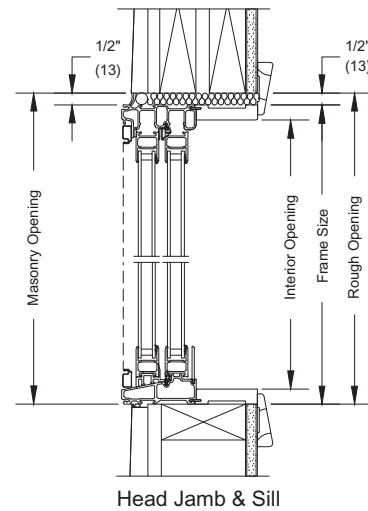





































Construction Details



GLIDER

2 Wide

MO (mm)	5' - 0" (1524)	6' - 0" (1828)	7' - 0" (2134)	8' - 0" (2438)	9' - 0" (2744)
RO (mm)	5' - 0" (1524)	6' - 0" (1828)	7' - 0" (2134)	8' - 0" (2438)	9' - 0" (2744)
FS (mm)	4' - 11 1/2" (1511)	5' - 11 1/2" (1816)	6' - 11 1/2" (2121)	7' - 11 1/2" (2426)	8' - 11 1/2" (2734)

1' - 5 3/4" (451) 1' - 6" (457) 1' - 5 1/2" (445)					
1' - 11 3/4" (603) 2' - 0" (610) 1' - 11 1/2" (597)					
2' - 5 3/4" (756) 2' - 6" (762) 2' - 5 1/2" (749)					
2' - 11 3/4" (908) 3' - 0" (914) 2' - 11 1/2" (902)					
3' - 5 3/4" (1060) 3' - 6" (1067) 3' - 5 1/2" (1054)					
3' - 11 3/4" (1213) 4' - 0" (1219) 3' - 11 1/2" (1207)					
4' - 5 3/4" (1365) 4' - 6" (1372) 4' - 5 1/2" (1359)					
4' - 11 3/4" (1518) 5' - 0" (1524) 4' - 11 1/2" (1511)					

GBG available in standard Rectangular lite cut, shown above. Other GBG lite cuts shown on page 3.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.

Details and Elevations not to scale.

XO operation standard, OX operation optional. Obscure Glass option available on all units.

Special sized units available within product size matrix. See your Marvin retailer.

See page 52 for specific PG Ratings.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullled.


MAXIMUM ROUGH OPENING not to exceed 114" x 60". Maximum up to 3 units wide by 1 unit high.

MAXIMUM ROUGH OPENING not to exceed 72" x 78". Maximum up to 2 units wide by 2 units high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Marvin representative for more information.

Construction Details

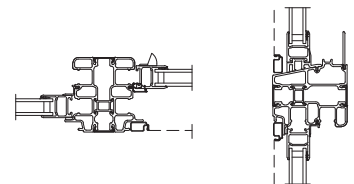

Vertical Mullion

Horizontal Mullion