

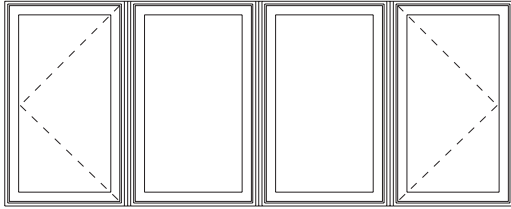



# CASEMENT BOWS

## 4 Wide Bows

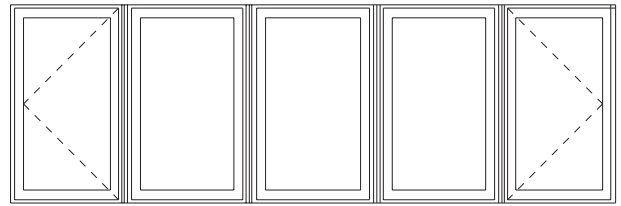

## 5 Wide Bows




CN Width	RO Width		Projection	
	Inches	(mm)	Inches	(mm)
17 – 4W	66 17/64	(1683)	6 7/8	(175)
21 – 4W	81 53/64	(2078)	8 17/32	(217)
25 – 4W	97 25/64	(2474)	10 3/16	(259)
29 – 4W	112 61/64	(2869)	11 27/32	(301)


CN Width	RO Width		Projection	
	Inches	(mm)	Inches	(mm)
17 – 5W	81 31/64	(2070)	10 1/4	(260)
21 – 5W	100 5/8	(2556)	12 23/32	(323)
25 – 5W	119 3/4	(3042)	15 11/64	(385)

CN Height	RO Height	
	Inches	(mm)
31	31 13/16	(808)
35	35 13/16	(910)
39	39 13/16	(1011)
43	43 13/16	(1113)
47	47 13/16	(1214)
55	55 13/16	(1418)
59	59 13/16	(1519)
63	63 13/16	(1621)
71	71 13/16	(1824)

## Construction Details

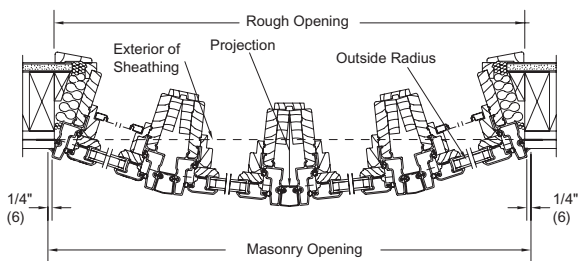

4-Wide Casement Bow Unit

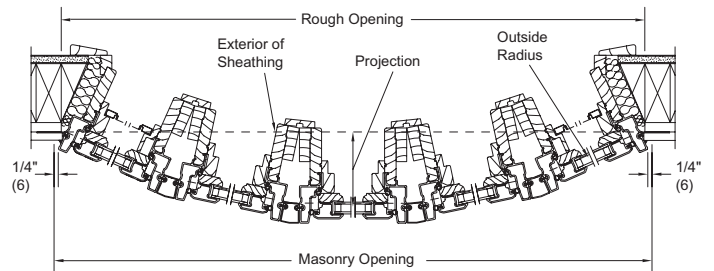

5-Wide Casement Bow Unit

Details and Elevations not to scale.



For rough opening height of a Bay or Bow, add 3/16" to Casement rough opening height.

\* When using Marvin Bays and Bows to replace products within existing openings, you will want to contact your local Marvin dealer for assistance and field verification of dimensions.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.

# CASEMENT BAYS

## 30° Bays

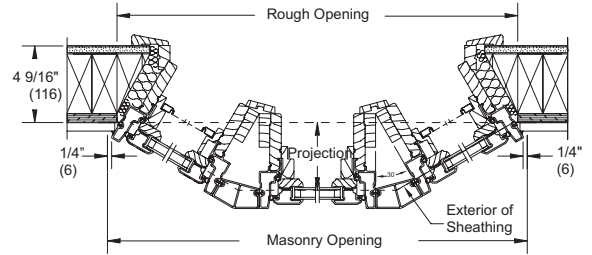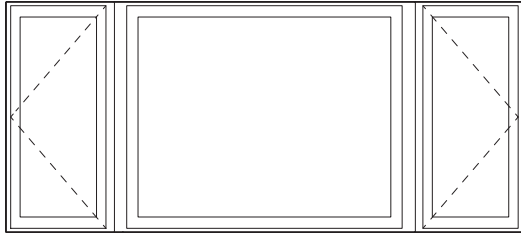


30° Casement Bay with Stationary/ Center Picture Unit

CN Width	RO Width		Projection	
	Inches	(mm)	Inches	(mm)
17-17-17	49 25/64	(1255)	8 5/8	(219)
17-21-17	53 25/64	(1356)	8 5/8	(219)
17-25-17	57 25/64	(1458)	8 5/8	(219)
17-29-17	61 25/64	(1559)	8 5/8	(219)
17-33-17	65 25/64	(1661)	8 5/8	(219)
17-37-17	69 25/64	(1763)	8 5/8	(219)
17-41-17	73 25/64	(1864)	8 5/8	(219)
17-49-17	81 25/64	(2067)	8 5/8	(219)
21-17-21	56 21/64	(1431)	10 5/8	(270)
21-21-21	60 21/64	(1532)	10 5/8	(270)
21-25-21	64 21/64	(1634)	10 5/8	(270)
21-29-21	68 21/64	(1736)	10 5/8	(270)
21-33-21	72 21/64	(1837)	10 5/8	(270)
21-37-21	76 21/64	(1939)	10 5/8	(270)
21-41-21	80 21/64	(2040)	10 5/8	(270)
21-49-21	88 21/64	(2244)	10 5/8	(270)
21-57-21	96 21/64	(2447)	10 5/8	(270)
21-73-21	112 21/64	(2853)	10 5/8	(270)
25-17-25	63 1/4	(1607)	12 5/8	(321)
25-21-25	67 1/4	(1708)	12 5/8	(321)
25-25-25	71 1/4	(1810)	12 5/8	(321)
25-29-25	75 1/4	(1911)	12 5/8	(321)
25-33-25	79 1/4	(2013)	12 5/8	(321)
25-37-25	83 1/4	(2115)	12 5/8	(321)
25-41-25	87 1/4	(2216)	12 5/8	(321)
25-49-25	95 1/4	(2419)	12 5/8	(321)
25-57-25	103 1/4	(2623)	12 5/8	(321)
29-17-29	70 11/64	(1782)	14 5/8	(372)
29-21-29	74 11/64	(1884)	14 5/8	(372)
29-25-29	78 11/64	(1986)	14 5/8	(372)
29-29-29	82 11/64	(2087)	14 5/8	(372)
29-33-29	86 11/64	(2189)	14 5/8	(372)
29-37-29	90 11/64	(2290)	14 5/8	(372)
29-41-29	94 11/64	(2392)	14 5/8	(372)
29-49-29	102 11/64	(2595)	14 5/8	(372)
29-57-29	110 11/64	(2798)	14 5/8	(372)


CN Width	RO Width		Projection	
	Inches	(mm)	Inches	(mm)
33-17-33	77 7/64	(1959)	16 5/8	(422)
33-21-33	81 7/64	(2060)	16 5/8	(422)
33-25-33	85 7/64	(2162)	16 5/8	(422)
33-29-33	89 7/64	(2263)	16 5/8	(422)
33-33-33	93 7/64	(2365)	16 5/8	(422)
33-37-33	97 7/64	(2467)	16 5/8	(422)
33-41-33	101 7/64	(2568)	16 5/8	(422)
33-49-33	109 7/64	(2771)	16 5/8	(422)
37-17-37	84 1/32	(2134)	18 5/8	(473)
37-21-37	88 1/32	(2236)	18 5/8	(473)
37-25-37	92 1/32	(2338)	18 5/8	(473)
37-29-37	96 1/32	(2439)	18 5/8	(473)
37-33-37	100 1/32	(2541)	18 5/8	(473)
37-37-37	104 1/32	(2642)	18 5/8	(473)

**CASEMENT BAYS**

45° Bays

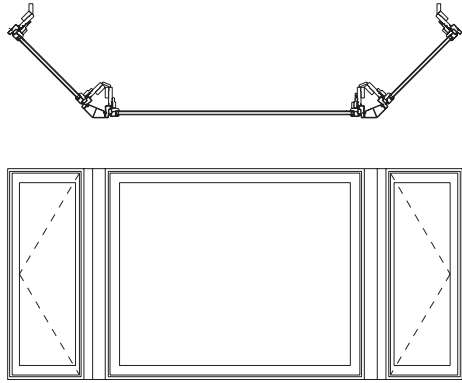

Construction Details

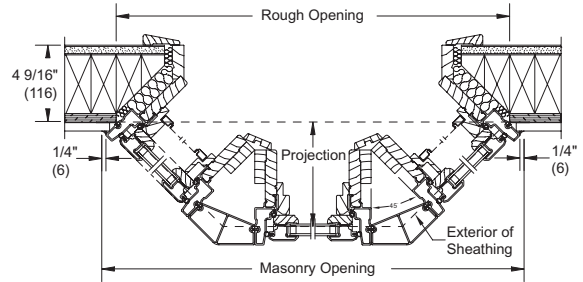

45° Casement Bay with Stationary/Center Picture Unit

CN Width	RO Width		Projection	
	Inches	(mm)	Inches	(mm)
17-17-17	46 11/64	(1173)	12 43/64	(322)
17-21-17	50 11/64	(1274)	12 43/64	(322)
17-25-17	54 11/64	(1376)	12 43/64	(322)
17-29-17	58 11/64	(1478)	12 43/64	(322)
17-33-17	62 11/64	(1579)	12 43/64	(322)
17-37-17	66 11/64	(1681)	12 43/64	(322)
17-41-17	70 11/64	(1782)	12 43/64	(322)
17-49-17	78 11/64	(1986)	12 43/64	(322)
21-17-21	51 53/64	(1317)	15 1/2	(394)
21-21-21	55 53/64	(1418)	15 1/2	(394)
21-25-21	59 53/64	(1520)	15 1/2	(394)
21-29-21	63 53/64	(1621)	15 1/2	(394)
21-33-21	67 53/64	(1723)	15 1/2	(394)
21-37-21	71 53/64	(1825)	15 1/2	(394)
21-41-21	75 53/64	(1926)	15 1/2	(394)
21-49-21	83 53/64	(2129)	15 1/2	(394)
21-57-21	91 53/64	(2333)	15 1/2	(394)
21-73-21	107 53/64	(2739)	15 1/2	(394)
25-17-25	57 31/64	(1460)	18 21/64	(466)
25-21-25	61 31/64	(1562)	18 21/64	(466)
25-25-25	65 31/64	(1663)	18 21/64	(466)
25-29-25	69 31/64	(1765)	18 21/64	(466)
25-33-25	73 31/64	(1867)	18 21/64	(466)
25-37-25	77 31/64	(1968)	18 21/64	(466)
25-41-25	81 31/64	(2070)	18 21/64	(466)
25-49-25	89 31/64	(2273)	18 21/64	(466)
25-57-25	97 31/64	(2476)	18 21/64	(466)
25-73-25	113 1/2	(2883)	18 21/64	(466)
29-17-29	63 9/64	(1604)	21 5/32	(537)
29-21-29	67 9/64	(1706)	21 5/32	(537)
29-25-29	71 9/64	(1807)	21 5/32	(537)
29-29-29	75 9/64	(1909)	21 5/32	(537)
29-33-29	79 9/64	(2011)	21 5/32	(537)
29-37-29	83 9/64	(2112)	21 5/32	(537)
29-41-29	87 9/64	(2213)	21 5/32	(537)
29-49-29	95 9/64	(2417)	21 5/32	(537)
29-57-29	103 9/64	(2620)	21 5/32	(537)

Details and Elevations not to scale.

For rough opening height of a Bay or Bow, add 3/16" to Casement rough opening height.

\* When using Marvin Bays and Bows to replace products within existing openings, you will want to contact your local Marvin dealer for assistance and field verification of dimensions.

For further details and drawings visit the 'Tools and Documents' section at Marvin.com.